


TECHNICAL INFORMATION

PARAMETER	ASTRAL XLPE SPECIFICATION		
Material (ASTM C 1427)	Chemically Cross Linked Closed Cell Polyethylene Foam Insulation		
Temperature Range	(-)40° C to +115°C		
Nominal Density	30 ± 3Kg/m3		
Thermal Conductivity	Mean Temperature (°C)	W/m °K	Kcal/hr m (°C)
	0	0.0318	0.0273
	23	0.0329	0.0283
	26	0,0382	0.0328
Water Vapour Resistance Factor (μ) (MEW) - (DIN - 52615)	Moisture Resistance Factor (μ) >9000 (for plain foam) >14000 (for Al foil faced foam)		
Dimensional Stability: BS 4370 Part 1	Change in dimension at -20° C for 4 hrs: <0.5% and at 110°C for 4 hrs: <0.5%		
Limiting Oxygen Index: ASTM D 2863	24%		
Compression Strength @ 25%: ASTM D 3575	0.44 Kgf/cm2		
Resistance to Chemical: ASTM C 543	No characteristic change observed		
Tensile Strength @ 50 mm/min: ASTM D 3575	2.51 Kgf/cm2		
Elongation at Break: ASTM D 3575	133.2%		
Fungal Resistance: ASTM G21	No growth observed		
Volume % -age of closed cell: ASTM D 6226 Part 2	>90%		
Sound Transmission Class for 9 mm foam with 12 mm Gypsum board: ASTM E 413 / ISO 140 board: ASTM E 413 / ISO 140	40 dB		
Water Absorption: ASTM C 209 / ASTM 1763	<0.2%		
Water Vapour Permeance: ASTM E96	0.15 ng/pas.m		
Health & Safety Aspects	CFC / HCFC Free: Dust and Fibre Free, VOC / SVOC Free		
Emission of Volatile Organic Compound (VOC)	Negligible		
Applications	HVAC, Textile & Building Industry		



CHEMICALLY CROSS LINKED CLOSED CELL POLYETHYLENE FOAM INSULATION

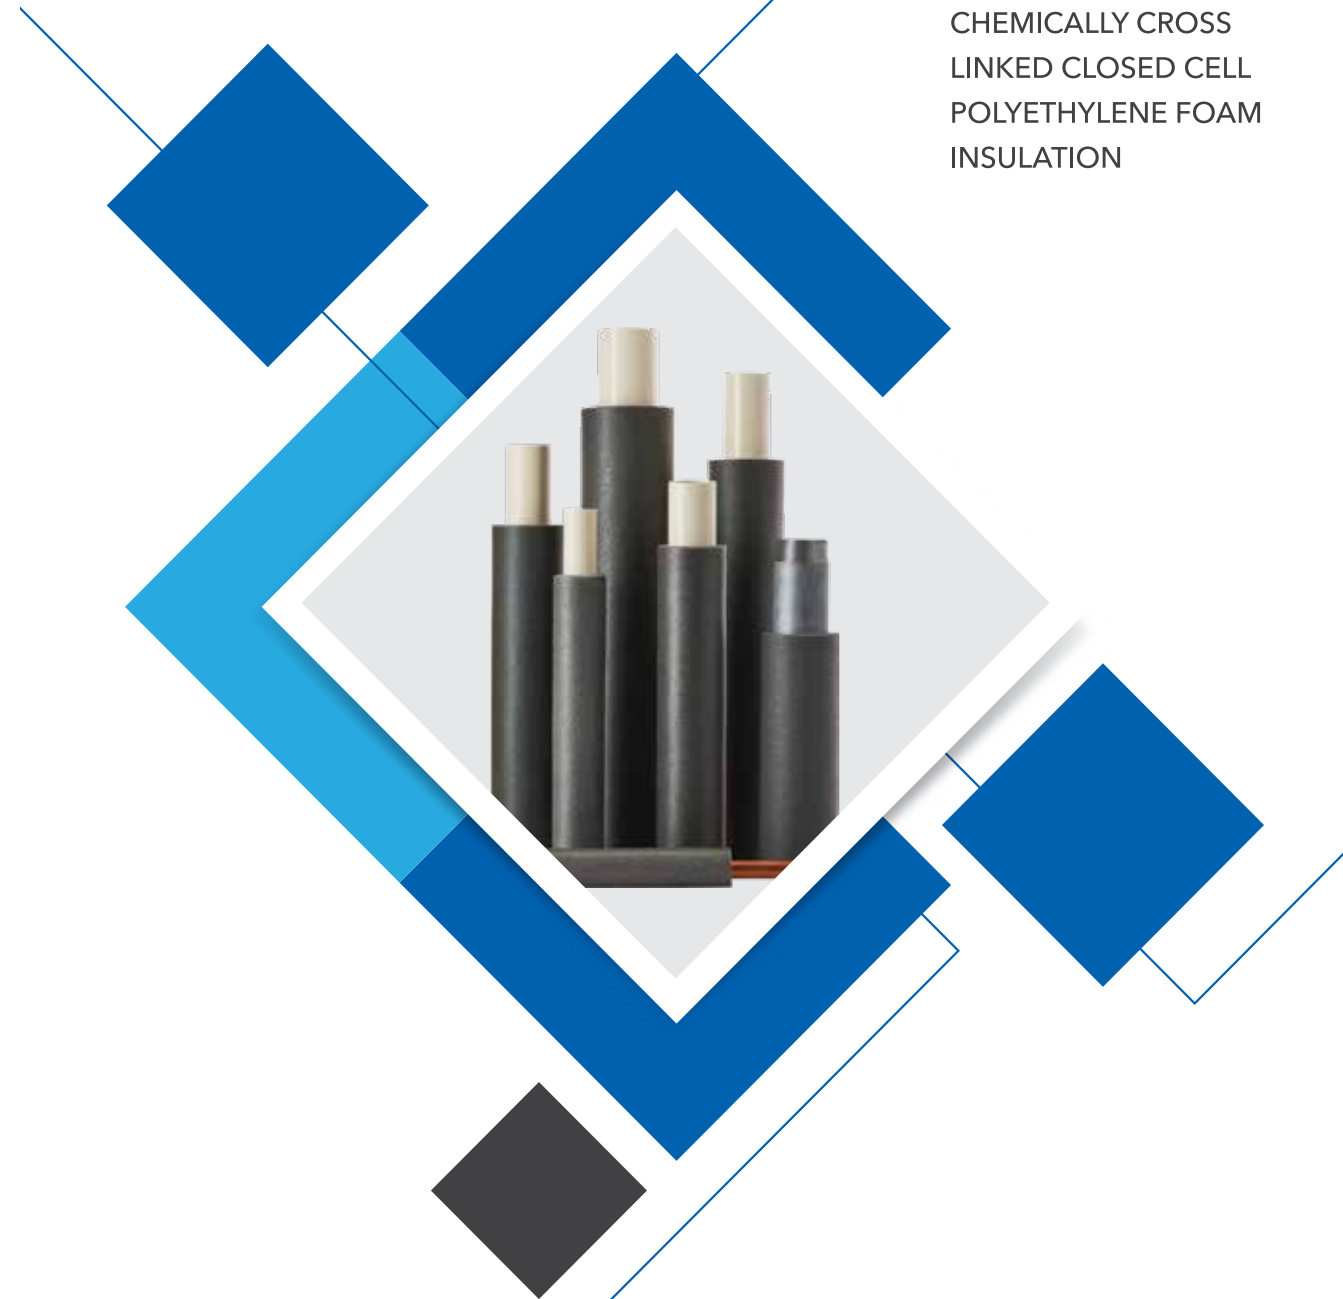

ASTRAL TOLL FREE 1800 233 7957
Please get in touch with us between 10 a.m. to 6 p.m.

Follow us on:

ASTRAL POLY TECHNIK LIMITED


REGISTERED & CORPORATE OFFICE:

207/1, Astral House, B/h. Rajpath Club,
Off. S.G. Highway, Ahmedabad-380 059,
Gujarat, India.
Phone : +91 79 6621 2000
Fax : +91 79 6621 2121
E-mail : info@astralpipes.com
Website : www.astralpipes.com

BRANCH OFFICES:

Bengaluru : Telefax : (080) 2661 7236	E-mail : bengaluru@astralpipes.com
Chennai : Phone : (044) 4350 6384	E-mail : chennai@astralpipes.com
Hyderabad : Telefax : (040) 2332 0023	E-mail : hyderabad@astralpipes.com
Jaipur : Phone : (0141) 2974 322	E-mail : jaipur@astralpipes.com
Kochi : Phone : (0484) 28097 98	E-mail : kochi@astralpipes.com
Lucknow : Phone : (0522) 2728 844	E-mail : lucknow@astralpipes.com
Mumbai : Phone : (022) 2838 9744	E-mail : mumbai@astralpipes.com
New Delhi : Phone : (011) 2616 8156	E-mail : delhi@astralpipes.com
Pune : Phone : (0) 844611 4455	E-mail : pune@astralpipes.com
Indore : Phone : (0731) 494 6661	E-mail : indore@astralpipes.com
Kolkata : Phone : (0) 98312 86491	E-mail : kolkata@astralpipes.com

Authorised Dealer :





ABOUT ASTRAL XLPE INSUPRO

ASTRAL XLPE INSUPRO insulation tubes are specially designed for plastic & metal piping system for applications in building construction and various other industries for plumbing, HVAC, chilling thermal insulation etc.

ASTRAL XLPE INSUPRO is produced using advanced manufacturing machineries & equipment setup which is capable of manufacturing the product in line with the international norms. Highest quality raw materials, standard manufacturing practices and quality management systems ensure ASTRAL XLPE to be the best quality end-product.



Astral Insupro Tubes - Length - 2.0 m, Colour - Grey

Tube ID Ø [mm]	Insulation Thickness						Recommended For Nominal Pipe Size	
	6 mm		9 mm		13 mm		Coper & CPVC	uPVC / MS / GI
	Product Code	pcs/ Bundle	Product Code	pcs/ Bundle	Product Code	pcs/ Bundle		
15.9	IP-06.16.15N	300	IP-09.16.15N	200	IP-13.16.15N	150	15 mm (½")	-
22.3	IP-06.22.20N	200	IP-09.22.20N	150	IP-13.22.20N	100	20 mm (¾")	15 mm (½")
28.7	IP-06.28.25N	150	IP-09.28.25N	150	IP-13.28.25N	100	25 mm (1")	20 mm (¾")
35.0	-	-	IP-09.35.32N	100	IP-13.35.32N	70	32mm (1¼")	25mm (1")
43.4	-	-	IP-09.43.40N	70	IP-13.43.40N	60	40 mm (1½")	32 mm (1¼")
54.1	-	-	IP-09.54.50N	60	IP-13.54.50N	40	50 mm (2")	-

APPLICATION AREAS

- Pipe Insulation

SALIENT FEATURES

- Negligible water/ moisture absorption (>90 % closed cell)
- Wide operating temperature range : -40°C to +115°C
- Excellent thermal insulation
- Resistance to fungi & bacteria
- Chemically unreactive
- Stable K value
- Maintenance free
- Fibre free & dust free
- Flexible & easy to install

